

NEWAY 10W


NEWAY LED BOLLARD

Indoor Luminaire

Product Code:

405K075L10H.NHG

10W - 600lm - 3000K - CRI>70 Ra



Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	240 VAC, 50Hz
Rated Input Wattage	10W ± 10%
Rated Input Current	0.048 Amp (Nominal)
Power Factor	≥0.90
ATHD	<20%
Rated Luminous Flux	600 lm (tolerance as per BIS)
Rated Luminaire Efficacy	60 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with Powder Coating
Lens / Reflector	Polycarbonate Diffuser
Mounting	Surface

Protections


Over Voltage Protection	Withstand upto 300V/AC for 20 min.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP65
Impact Protection (IK Rating)	IK07
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided



All technical data is subject to industry-standard tolerances.

Product Dimensions (Dia.xH)

Ø158 X 750 mm (tol.±5 mm)

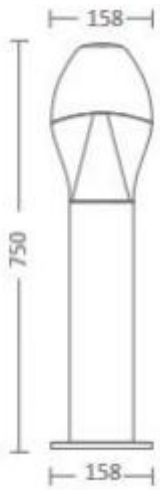

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.