

### TITANO 10W


TITANO LED BOLLARD

Indoor Luminaire

Product Code:

824.075L10H.NHG

10W - 560lm - 3000K - CRI>70 Ra



### Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	240 VAC, 50Hz
Rated Input Wattage	10W ± 10%
Rated Input Current	0.050 Amp (Nominal)
Power Factor	≥0.90
ATHD	<20%
Rated Luminous Flux	560 lm (tolerance as per BIS)
Rated Luminaire Efficacy	56 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Extruded Aluminium with Powder Coating
Lens / Reflector	Transparent Polycarbonate Diffuser
Mounting	Surface


### Protections

Over Voltage Protection	Withstand upto 300V/AC for 20 min.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP65
Impact Protection (IK Rating)	IK08
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

## Product Dimensions (DiaxH)

Ø145 X 750 mm (Tol.±5 mm)

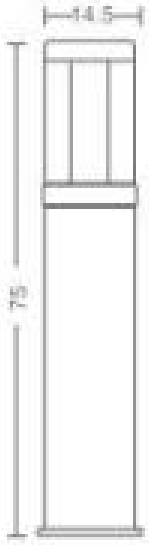

## Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.