

MIRA 5W

Mira 65 LED Ground Burial
Outdoor Luminaire

Product Code:

4183LL5H.BRZ

5W - 300lm - 3000K - CRI>80 Ra



Technical Specifications

Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220-240 VAC, 50Hz
Rated Input Wattage	5W ± 10%
Rated Input Current	0.050 Amp (Nominal)
Power Factor	≥0.5
Rated Luminous Flux	300 lm (tolerance as per BIS)
Rated Luminaire Efficacy	60 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Driver Efficiency	≥70%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Extruded Anodized Aluminium
Lens / Reflector	Opal Polycarbobate Diffuser
Mounting	Surface/Ground


Protections

Over Voltage Protection	Withstand upto 300V/AC for 4 Hrs.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP66
Impact Protection (IK Rating)	IK08
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Product Dimensions (L x W x H)

Ø80 X 95 mm (Tol.±5 mm)

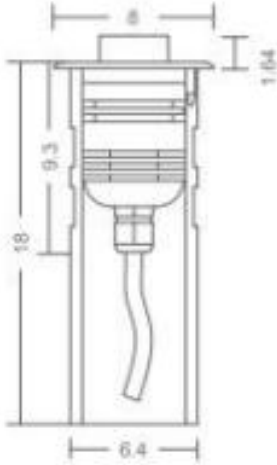

Applications

Applications Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.