

### MIRA 5W


MIRA

**Projector Lights**

**Product Code:**

5383LL5H.INX

5W - 300lm - 3000K - CRI>80 Ra - Beam Angle 30°



### Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	5W ± 10%
Rated Input Current	0.050 Amp (Nominal)
Power Factor	≥0.5
Rated Luminous Flux	300 lm (tolerance as per BIS)
Rated Luminaire Efficacy	60 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	30° (within the permissible limits)
Driver Efficiency	≥70%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Extruded Anodized Aluminium Body
Lens / Reflector	Glass Diffuser
Mounting	Surface/Ground


### Protections

Over Voltage Protection	Withstand upto 300V/AC for 20 Min.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP67
Impact Protection (IK Rating)	IK08
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

## Product Dimensions (Dia. x H)

Ø80 X 95 mm

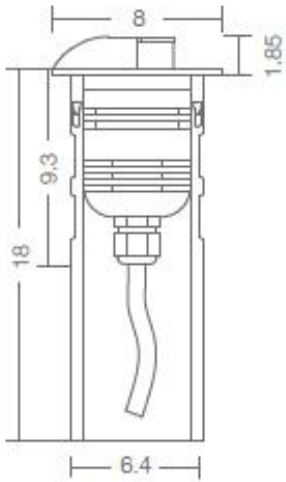

## Applications

Façade lighting, Accent lighting, Atriums and columns,  
Architectural lighting, Varied beam angle applications