



BATH + LIGHT

WALL LIGHT 3W


Carina LED Wall Light

Outdoor Luminaire

Product Code:

LWWL03X103XW

3W - 105lm - 3000K - CRI>70 Ra - Beam Angle - 78°



Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240 V AC, 50Hz
Rated Input Wattage	3W ± 10%
Rated Input Current	0.015 Amp (Nominal)
Power Factor	>0.9
ATHD	<30%
Rated Luminous Flux	105 lm (tolerance as per BIS)
Rated Luminaire Efficacy	35 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Beam Angle	78° (within the permissible limits)
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Die Cast with Powder Coating
Lens / Reflector	Transparent Tempered Glass Diffuser
Mounting	Surface/Wall


Protections

Over Voltage Protection	300 V AC upto 20 Min.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP54
Impact Protection (IK Rating)	IK07
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Product Dimensions (L x W x H)

95 X 76 X 92 mm (tol.±5 mm)

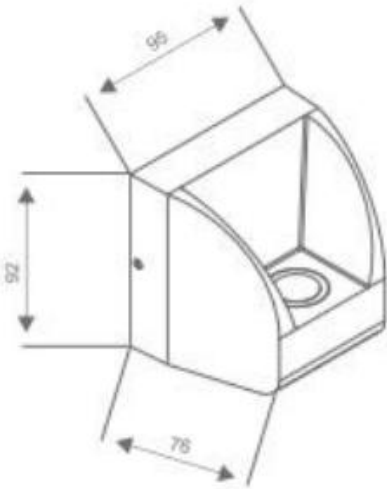

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other outdoor applications.